




EMMYWATCH

VINTAGE RESTORATIONS

Seiko 2919A Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>


Calibre No. 2919A	Jewels 21j	Style Name
Basic Calibre 2906A-17J-Catalog No. 29.08-1		

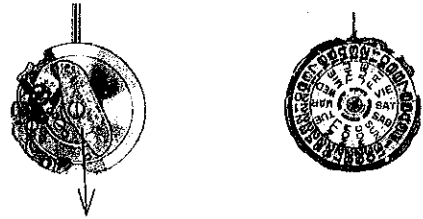

Cal. 2919A

Characteristics

Casing diameter : ϕ 18.0 mm
 Maximum height : 5.3 mm without battery
 Jewels : 21 j
 Vibration per hour : 28,800
 Automatic and auxiliary hand winding with sweep second
 Calendar (day and date)
 Instant setting device for day & date calendar
 Bilingual change over system for day of the week
 "Diashock" Shock resistant device

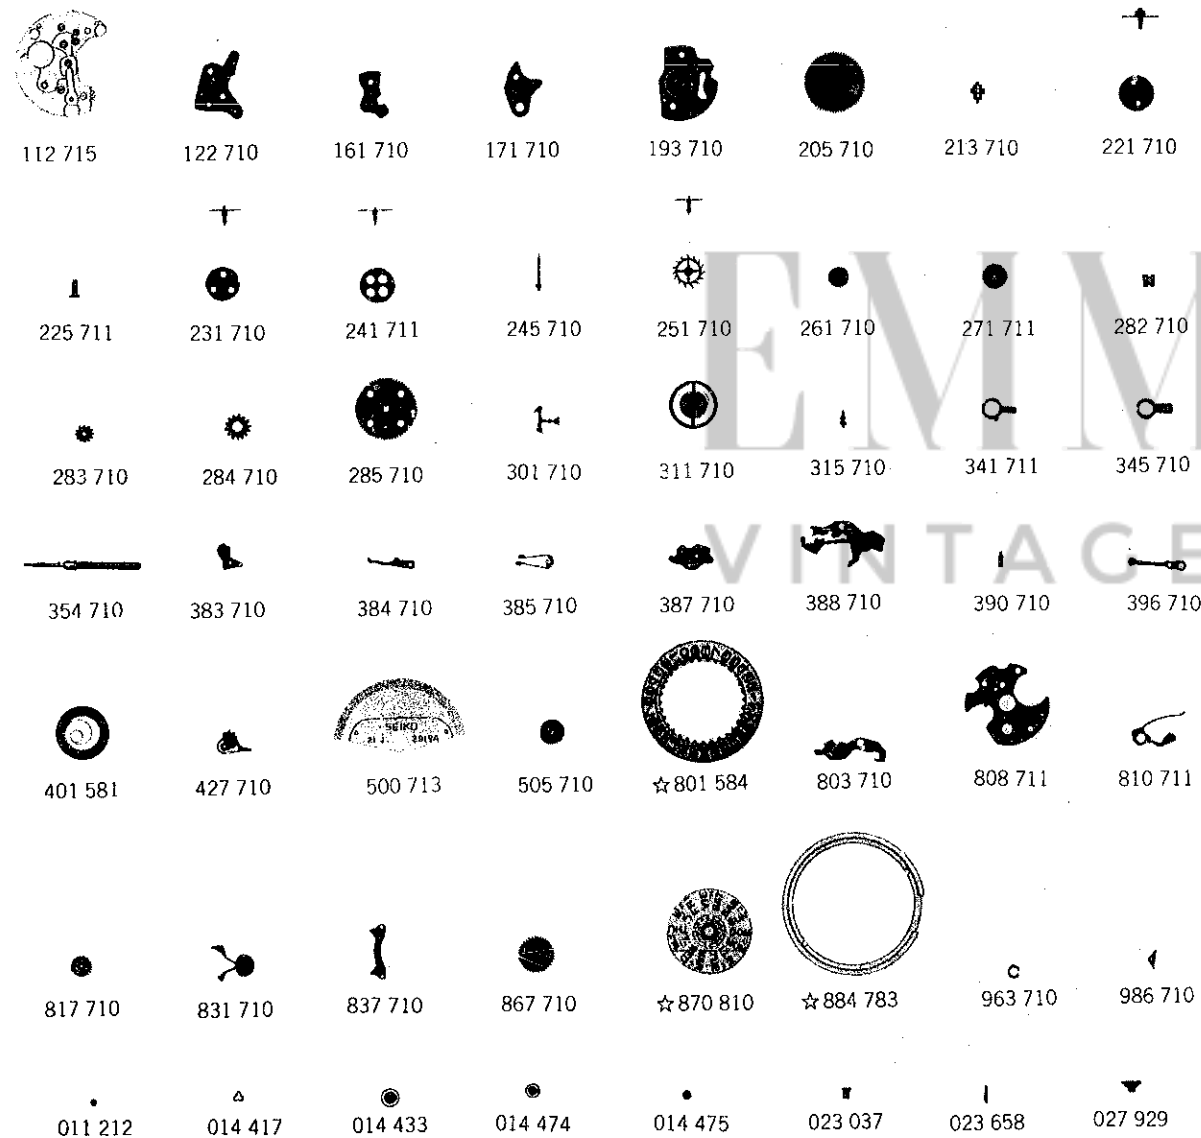

022 257 022 282 ☆022 421 022 470 022 490 022 491 022 764 3/4

Calibre No. 2919A		Jewels 21j		Style Name	
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS		
112 715	Barrel & train-wheel bridge	011 505	Lower hole jewel for escape wheel		
122 710	Center wheel bridge	011 505	Upper hole jewel for pallet		
161 710	Pallet cock	011 505	Lower hole jewel for pallet		
171 710	Balance cock	011 505	Upper hole jewel for fourth wheel & pinion		
193 710	Frame work for automatic device with ball-bearing	011 505	Lower hole jewel for fourth wheel & pinion		
205 710	Complete barrel with arbor	011 716	Upper hole jewel for center wheel		
213 710	Barrel arbor	014 417	Diashock spring		
221 710	Center wheel & pinion	014 433	Diashock upper frame		
225 711	Cannon pinion	014 474	Diashock lower frame		
231 710	Third wheel & pinion	014 475	Diashock hole jewel with frame		
241 711	Fourth wheel & pinion	022 257	Yoke screw		
245 710	Sweep second pinion	022 282	Minute wheel bridge screw		
251 710	Escape wheel & pinion	022 282	Date dial guard screw		
261 710	Minute wheel	☆022 421	Case screw		
271 711	Hour wheel	022 470	Barrel & train wheel bridge screw		
282 710	Clutch wheel	022 470	Center wheel bridge screw		
283 710	Winding pinion	022 470	Pallet cock screw		
284 710	Crown wheel	022 470	Balance cock screw		
285 710	Ratchet wheel	022 470	Friction spring screw for sweep second pinion		
301 710	Jewelled pallet fork & staff	022 490	Screw for oscillating weight		
311 710	Balance complete with stud	022 491	Frame work screw for automatic device with ball-bearing		
315 710	Balance staff	022 764	Dial screw		
341 711	Regulator	023 037	Date jumper pin		
345 710	Stud holder	023 658	Stud pin		
☆354 710	Winding stem	027 412	Pin for minute wheel		
383 710	Setting lever	027 929	Crown wheel pin		
384 710	Yoke (Clutch lever)				
385 710	Yoke spring (Clutch lever spring)				
387 710	Minute wheel bridge				
388 710	Setting lever spring				
390 710	Setting lever axle				
396 710	Friction spring for sweep second pinion				
401 581	Mainspring with slipping attachment				
427 710	Click lever				
500 713	Oscillating weight				
505 710	Transmission wheel				
☆801 584	Date dial				
803 710	Setting wheel lever complete				
808 711	Date dial guard				
810 711	Date jumper				
817 710	Intermediate date wheel				
831 710	Pawl lever with jewel				
837 710	Pawl lever holder				
867 710	Day-date driving wheel				
☆870 810	Day star with dial disk				
☆884 783	Holding ring for dial				
963 710	Snap for day star with dial disk				
986 710	Day-date corrector wheel rocking lever				
011 151	Upper hole jewel for transmission wheel				
011 151	Lower hole jewel for transmission wheel				
011 153	Lower hole jewel for center wheel				
011 212	Diashock cap jewel				
011 308	Lower hole jewel for third wheel				
011 323	Upper hole jewel for third wheel				
011 323	Upper hole jewel for sweep second pinion				
011 505	Upper hole jewel for escape wheel				

☆ ⇨ Please see remarks on the next page.
 Items in light letters are not shown in photos.

Catalog No.

Calibre No. 2919A	Jewels 21j	Style Name
-----------------------------	----------------------	------------

Remarks :

Winding stem

☆354 710.....The type of winding stem is determined based on the design of cases and dials.
Check the case number and refer to "SEIKO Quartz Casing Parts Catalogue"
to choose a corresponding winding stem.

Date dial

☆801 584.....Used when both the crown and the date frame are located at **3** o'clock position.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position
③ the date frame position and ④ the dial No.

Day star with dial disk.

☆870 810(English-Spanish, black figures on white background).....

Used when both the crown and the day frame are located at **3** o'clock position.

If the day star with dial disk is required in any other type, specify the number printed
on the disk.

Holding ring for dial

☆884 783.....The type of a holding ring for dial is determined based on the design of cases.

Check the case number and refer to "SEIKO Quartz Casing Parts Catalogue"
to choose a corresponding holding ring for dial.

Case screw

☆022 421.....This screw is used depending on the type of case construction.

EMMYWATCH
VINTAGE RESTORATIONS