



Seiko 3702A Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>

Calibre No.


3702A

Jewels

16j

Style Name

⇒ Basic Calibre 37A 16J Catalog No. 37-00-1

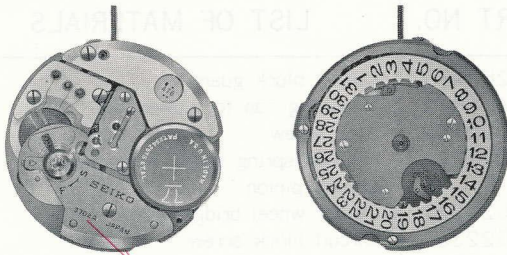

Cal. 3702A

Characteristics

- Electronic watch
(Non-contact points balance driven system)
- Casing diameter : 29.00 ϕ mm
- Maximum height : 6.00 mm
- Vibrations per hour : 21,600
- Sweep second
- Calendar (date)
- Instant date setting
- Second-setting device (Power supply switch)
- "Diashock" Shock Resistant Device



T	T	T	$\frac{2}{1}$
022449	022473	022753	

EMM WATCH
VINTAGE RESTORATIONS

☆⇒ Please see remarks on the reverse page.
As for all other parts not shown here, please refer to the basic calibre
(Cal. No. **37A** 16J Catalog No. 37-00-1 Green page).

Calibre No. <div style="font-size: 2em; font-weight: bold; text-align: center;">3702A</div>	Jewels <div style="font-size: 2em; font-weight: bold; text-align: center;">16j</div>	Style Name
⇨ Basic Calibre 37A 16J Catalog No. 37-00-1		

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
122472	Center wheel bridge	4283472	Circuit block guard
131472	Third wheel bridge	4414472	Insulating cap for power cell
161472	Pallet cock	022150	Stud screw
171473	Balance cock	022251	Friction spring screw for sweep second pinion
195510	Calendar plate	022351	Center wheel bridge screw
224473	Center wheel & pinion with cannon pinion	022351	Circuit block screw
225511	Cannon pinion	022362	Yoke screw (Clutch lever screw)
231510	Third wheel & pinion	022375	Setting lever spring screw
241473	Sweep second wheel & pinion	022376	Pallet cock screw
251472	Escape wheel & pinion	022449	Calendar plate screw
261510	Minute wheel	022473	Date corrector screw
271511	Hour wheel	022476	Balance cock screw
281510	Setting wheel	022476	Coil block screw
282514	Clutch wheel	022476	Circuit block guard screw
301472	Jewelled pallet fork & staff	022484	Third wheel bridge screw
310472	Balance complete with stud & permanent magnet	022486	Terminal screw of integrated block
341472	Regulator	022687	Retaining pawl screw
345510	Stud holder	022753	Date dial guard screw
☆ 354510 } ☆ 354514 }	Winding stem	022761	Dial screw
383472	Setting lever with axle	011117	Lower hole jewel for center wheel
384472	Yoke (Clutch lever)	011406	Upper hole jewel for 3rd wheel
386511	Setting lever spring (Set bridge)	011406	Lower hole jewel for 3rd wheel
391472	Second-setting lever	011421	Upper hole jewel for sweep second wheel
396472	Friction spring for sweep second pinion	011719	Lower hole jewel for sweep second wheel
492472	Rest for balance cock	011405	Upper hole jewel for escape wheel
966472	Retaining pawl for escape wheel	011405	Lower hole jewel for escape wheel
014533	Diashock upper frame	011503	Upper hole jewel for pallet
014534	Diashock lower frame	011503	Lower hole jewel for pallet
014225	Diashock hole jewel with frame	023103	Tube for circuit block screw (Power connection pin)
011210	Diashock cap jewel	023104	Tube for 3rd wheel bridge screw
014217	Diashock spring	023105	Tube for date corrector screw
632510	Date corrector finger	023147	Tube for yoke screw
☆ 801510	Date dial	023147	Tube for coil block screw (Second-setting lever pin)
802510	Date driving wheel	023147	Tube for calendar plate screw
808510	Date dial guard	023151	Tube for center wheel bridge screw
810720	Date jumper	023151	Tube for circuit block guard screw
811430	Date jumper spring	023178	Tube for balance cock screw
880510	Date corrector	EPX-77	Power cell (EVEREADY - UNION CARBIDE CORP.)
4002472	Coil block		
4003472	Circuit block		
4216591	Insulator for power connection		
4219472	Insulating pipe for power connection		
4270472	Power connection		


Remarks :

Winding stem ————— Refer to the shapes in the lower diagram. —————

- ☆ 354510.....**Short** winding stem (Thread is provided completely on the crown portion)
- ☆ 354514.....**Long** winding stem (Thread is provided only on the end of the crown portion.)



☆ 354510



☆ 354514

Date dial

- ☆ 801510 (Black figures on white background) Used when both the crown and the date frame are located at **3** o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

☆⇨ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. **37A** 16J Catalog No. 37-00-1 Green page).