



Seiko 5722A Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>


Calibre No.	430, 5722A	Jewels	35 j	Style Name	(Grand Seiko Selfdater)
↪ Basic Calibre 3180 25J Catalog No. 57-20-1					



Cal. 5722A (or 430)

Characteristics

- Chronometer
- Casing diameter : 27.60^φ mm
- Maximum height : 4.75 mm
- Vibrations per hour : 18,000
- Non-automatic with sweep second
- Micro-adjustor
- Second-setting device
- Calendar (date)
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device

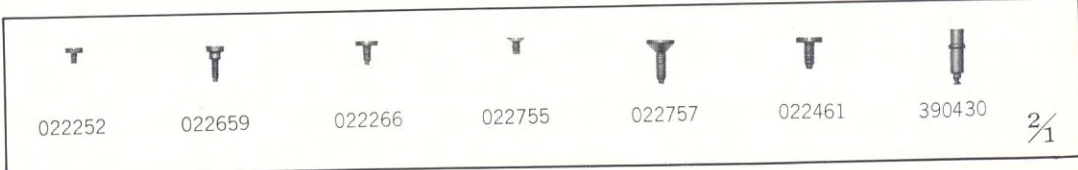

Catalog No. 57-22-1

☆ ⇨ Please see remarks on the reverse page.
As for all other parts not shown here, please refer to the basic calibre.

Calibre No. 430,5722A		Jewels 35j	Style Name (Grand Seiko Selfdater)	
⇒ Basic Calibre 3180 25J Catalog No. 57-20-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
111430	Barrel bridge			3rd wheel
122570	Center wheel bridge	015421	Diafix lower hole jewel with frame for 3rd wheel	
131430	Third wheel bridge	015431	Diafix upper hole jewel with frame for sweep second wheel	
161640	Pallet cock	015411	Diafix upper hole jewel with frame for escape wheel	
171430	Balance cock	015411	Diafix lower hole jewel with frame for escape wheel	
205430	Complete barrel with arbor & jewel	011206	Diafix cap jewel	
213430	Barrel arbor	015113	Diafix spring	
224430	Center wheel & pinion with cannon pinion	☆ 801430	Date dial	
225430	Cannon pinion	802720	Date driving wheel	
231640	Third wheel & pinion	803430	Setting wheel lever complete	
241430	Sweep second wheel & pinion	808430	Date dial guard	
251570	Escape wheel & pinion	809430	Date jumper guard	
261430	Minute wheel	810720	Date jumper	
271430	Hour wheel	811430	Date jumper spring	
282430	Clutch wheel	812430	Setting wheel lever spring	
283570	Winding pinion	814430	Setting wheel lever plate	
284640	Crown wheel	817720	Intermediate date wheel	
285640	Ratchet wheel	022150	Stud screw	
301640	Jewelled pallet fork & staff	022151	Bearing plate screw for sweep second wheel	
310640	Balance complete with stud	022252	Minute wheel bridge screw	
315570	Balance staff	022255	Pallet cock screw	
331610	Roller with jewel	022259	Bridge screw	
341640	Regulator	022266	Setting lever axle spring screw	
344640	Regulator adjusting device	022352	Center wheel bridge screw	
345640	Stud holder	022453	Ratchet wheel screw	
351572	Winding stem	022461	Case screw	
381570	Click	022578	Crown wheel screw	
382620	Click spring	022652	Click screw	
383700	Setting lever	022659	Setting lever spring screw	
384430	Yoke (Clutch lever)	022755	Date dial guard screw	
385430	Yoke spring (Clutch lever spring)	022755	Date jumper guard screw	
387430	Minute wheel bridge	022757	Dial screw	
388430	Setting lever spring	011123	Upper hole jewel for barrel	
389720	Setting lever axle spring	011105	Upper hole jewel for center wheel	
390430	Setting lever axle	011105	Lower hole jewel for center wheel	
391430	Second-setting lever	011503	Upper hole jewel for pallet	
395640	Micro-adjustor	011503	Lower hole jewel for pallet	
398640	Second setting lever washer	013901	Micro-adjustor pin	
401430	Mainspring (self-greasing)	023151	Tube for bridge screw	
446570	Bearing plate for sweep second wheel			
481570	Crown wheel ring			
491610	Dial washer			
014223	Diashock upper frame			
014214	Diashock lower frame			
014215	Diashock hole jewel with frame			
011205	Diashock cap jewel			
014217	Diashock spring			
015421	Diafix upper hole jewel with frame for			

Remarks :

☆ 801430 Used for the dial where the date frame is located at the 3 o'clock position.
 If the date dial of any other types is required for this calibre, please inform clearly ① the Cal. No. and ② the date frame position.

☆⇒ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre
 (Cal. No. 3180 25J Catalog No. 57-20-1 Green page).