










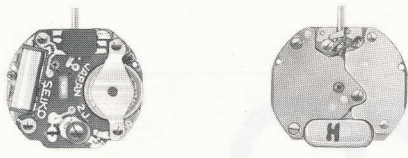


























Seiko 43A Movement Parts (1)













Compiled by EmmyWatch - <https://www.emmywatch.com>

Calibre No. <h1 style="text-align: center;">43A</h1>	Jewels <h1 style="text-align: center;">2j</h1>	Style Name
----------------------------------------------------------------	----------------------------------------------------------	-------------------

	<p>Characteristics</p> <p>Casing diameter : 18.00 ϕ mm Maximum height : 3.58 mm Frequency of quartz crystal oscillator : 32,768 Hz (Hz=Hertz Cycle per second) Driving system : Step motor system (2 poles) Regulation system : Trimmer condenser</p>
-----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

EMMYWATCH
 VINTAGE RESTORATIONS

							
131 060	154 002	☆ 194 004	231 026	241 032	261 221	270 005	271 028
							
281 009	282 028	354 042	354 044	372 004	373 250	☆ 383 028	
							
☆ 383 029	384 014	385 007	388 014	391 011	397 017	604 005	701 005
							
706 004	4001 036	4002 006	4146 004	☆ 4225 012	☆ 4242 044	4259 004	4270 012
							
011 541	U.C.C. 384						

									
012 354	012 417	012 443	012 444	012 752	012 775	012 776	017 074	017 079	017 503
		$\frac{3}{1}$							
017 714	017 924	$\frac{3}{1}$							

☆⇨ Please see remarks on the next page.

Calibre No.	43A	Jewels	2j	Style Name
-------------	------------	--------	-----------	------------

PART NO.	PART NAME	PART NO.	PART NAME
131 060	Third wheel bridge	4002 006	Coil block
154 002	Fifth wheel bridge	4146 004	Step rotor
☆194 004	Holding ring for movement	☆4225 012	Holding spring for battery
231 026	Third wheel & pinion	☆4242 044	Plus terminal of battery connection
241 032	Fourth wheel & pinion	4259 004	Back plate (anti-magnetic)
261 221	Minute wheel	4270 012	Battery connection
270 005	Center minute wheel (1.95 mm)	011 541	Upper hole jewel for step rotor
270 008	Center minute wheel (2.25 mm)	011 541	Lower hole jewel for step rotor
270 014	Center minute wheel (3.10 mm)	012 354	Setting lever spring screw
271 028	Hour wheel (1.18 mm)	012 417	Third wheel bridge screw
271 029	Hour wheel (1.45 mm)	012 443	Circuit block screw A
271 032	Hour wheel (2.30 mm)	012 444	Minute wheel bridge screw
281 009	Setting wheel	012 752	Fifth wheel bridge screw
282 028	Clutch wheel	012 775	Circuit block screw B
354 042	Winding stem (1 2.72 mm)	012 776	Back plate (anti-magnetic) screw
354 044	Winding stem (1 7.72 mm)	017 074	Stopper tube for circuit block
372 004	Joint stem (movement portion)	017 079	Tube for circuit block screw
373 250	Joint stem (case portion)	017 503	Spacer for circuit block
☆383 028	Setting lever	017 714	Lower bush for fifth wheel
☆383 029		017 924	Eccentric dial pin
384 014	Yoke (Clutch lever)	U.C.C.384	Silver oxide battery
385 007	Yoke spring (Clutch lever spring)		
388 014	Setting lever spring		
391 011	Second-setting lever		
397 017	Lever for unlocking stem		
604 005	Minute wheel bridge		
701 005	Fifth wheel		
706 004	Sixth wheel & pinion		
4001 036	Circuit block		

Remarks :

Holding ring for movement

The type of a holding ring for movement is determined based on the design of cases and dials. Check the case number and refer to "SEIKO Quartz Casing Parts List" to choose an appropriate holding ring for movement.

Setting lever

☆383 028, 383 029.....There are two types of setting levers. Select the suitable setting lever by referring to the shapes in the lower diagram.

If the combination of the setting lever and case is unknown, check the case number and refer to "SEIKO Quartz Casing Parts List" to choose an appropriate setting lever.



☆383 028



☆383 029

Holding spring for battery

☆4225 012Used only for case without battery hatch.

Plus terminal of battery connection

☆4242 044.....Used only for case with battery hatch.

☆⇔ Please see remarks.

Part numbers in light letters are not shown in photos.